


Kongres Container

Liquid-cooled energy storage aluminum products

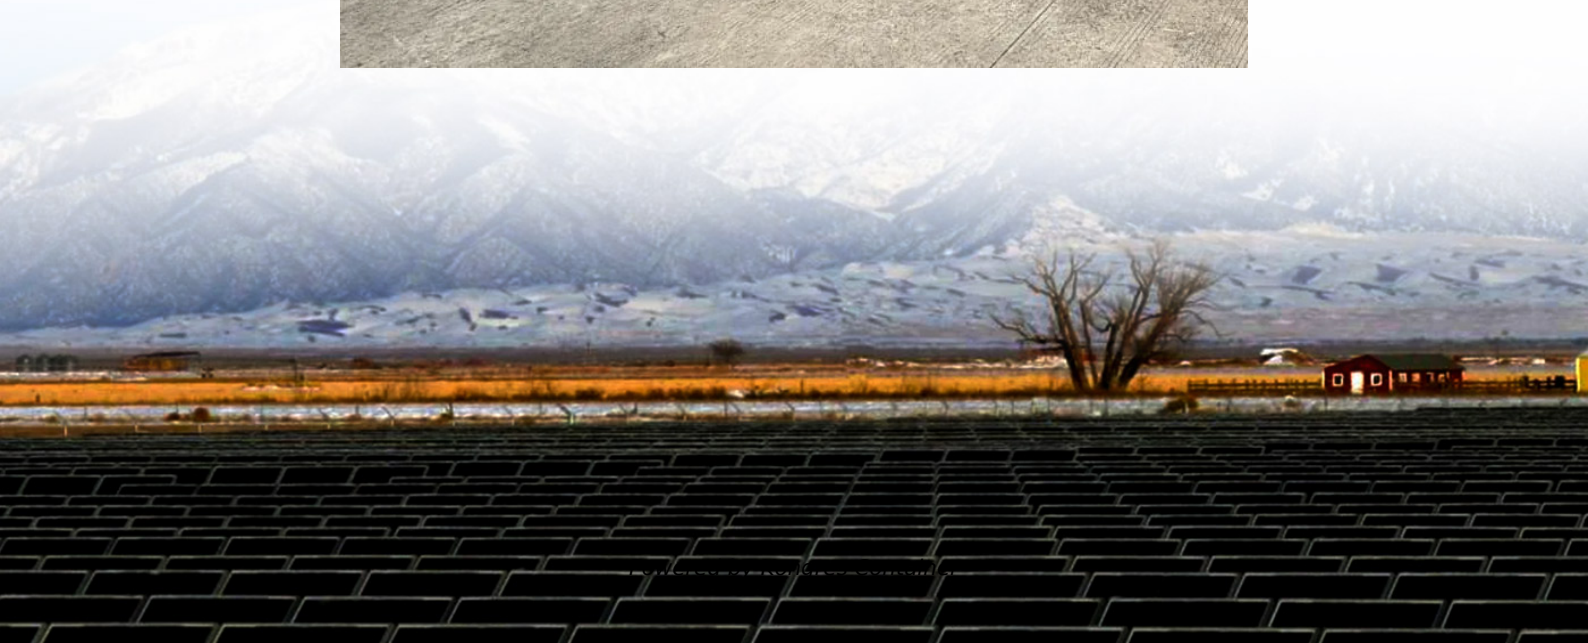

Overview

What is a liquid cooling thermal management system?

The liquid cooling thermal management system for the energy storage cabin includes liquid cooling units, liquid cooling pipes, and coolant. The unit achieves cooling or heating of the coolant through thermal exchange. The coolant transports heat via thermal exchange with the cooling plates and the liquid cooling units.

What is a liquid cooling unit?

The product installs a liquid-cooling unit for thermal management of energy storage battery system. It effectively dissipates excess heat in high-temperature environments while in low temperatures, it preheats the equipment. Such measures ensure that the equipment within the cabin maintains its lifespan.

What is a 5MWh liquid-cooling energy storage system?

The 5MWh liquid-cooling energy storage system comprises cells, BMS, a 20'GP container, thermal management system, firefighting system, bus unit, power distribution unit, wiring harness, and more. And, the container offers a protective capability and serves as a transportable workspace for equipment operation.

How does a liquid cooling unit work?

3.12.1.3 The design of the liquid cooling unit must align with the cabin structure, adequately addressing dust prevention needed in the operating environment. The liquid cooling pipeline operates in a closed loop. The coolant, propelled by a pump, circulates through the cold plate, exchanging heat with the batteries, which raises its temperature.

How to choose an energy storage unit?

The choice of the unit should be based on the cooling and heating capacity

parameters of the energy storage cabin, alongside considerations like installation, cost, and additional functionalities. 3.12.1.2 The unit must utilize a closed, circulating liquid cooling system.

What are the functions of the energy storage system?

The energy storage system supports functions such as grid peak shaving, frequency regulation, backup power, valley filling, demand response, emergency power support, and reactive power compensation. The 2.5MW/5.016MWh battery compartment utilizes a battery cluster with a rated voltage of 1331.2V DC and a design of 0.5C charge-discharge rate.

Liquid-cooled energy storage aluminum products

Contact Us

For catalog requests, pricing, or partnerships, please visit:
<https://www.drugiswiatowykongrespolakow.pl>